




State of the Art, Inc.

0202 Thin Film Chip Resistor

Standard Grade, Surface Mount, Solderable

PROTECTIVE
ENCAPSULANT



99.6% ALUMINA CHIP

PRECISION
THIN FILM
RESISTOR

FEATURES

- Tolerances to $\pm 0.1\%$
- Operating temperature range : -55°C to $+150^{\circ}\text{C}$
- For high-density hybrid circuits where space is at a premium
- TCR's to ± 25 ppm
- Made with the same materials and process as our MIL-PRF-55342 "S" level qualified chips
- Delivers greater power handling capability with lighter weight construction



PERFORMANCE CHARACTERISTICS

Resistance Range	$5\Omega - 35K\Omega$
Tolerances	0.1%, 0.25%, 0.5%, 1%, 2%, 5%, 10%
Maximum Power	25 mW
Maximum Voltage	20 Volts



ENVIRONMENTAL PERFORMANCE (1)

TCR (-55 to $+125^{\circ}\text{C}$ in ppm/ $^{\circ}\text{C}$)	< 25 ppm
Thermal Shock	$\pm 0.02\%$
Low Temperature Operation	$\pm 0.02\%$
Short-time Overload	$\pm 0.02\%$
Resistance to Bonding Exposure	$\pm 0.02\%$
Moisture Resistance	$\pm 0.03\%$
High Temperature Exposure	$\pm 0.03\%$
Life	See Chart

(1) Typical resistance change, the maximum is the same as MIL-PRF-55342. Test methods are per MIL-PRF-55342.

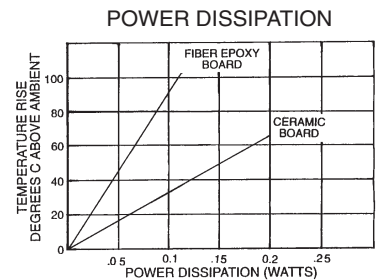


TYPICAL LIFE TEST PERFORMANCE

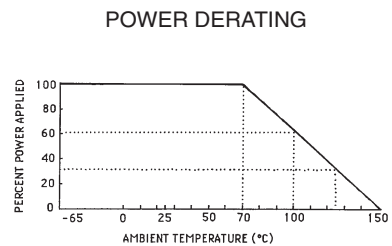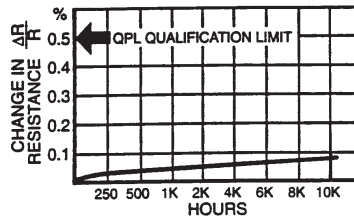

PART NUMBERING

S0202AA 150 J H W

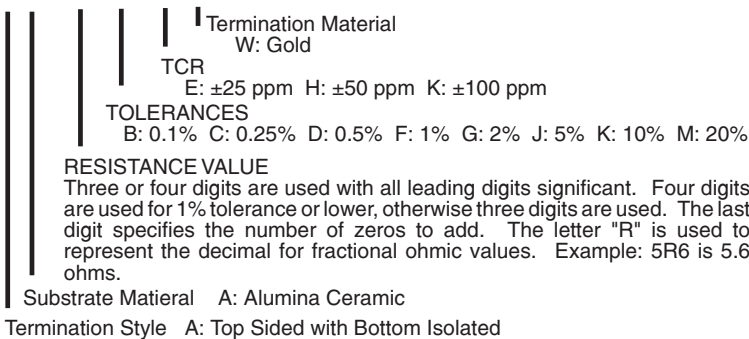

PACKAGING

Two packaging options are available:

- Bulk Packaging - (5000 per Bag Max.)
- Waffle Pack - (400 per Tray Max.)

MECHANICAL

	INCHES	MM
Length	.020 (+.002/-0.002)	.51 (+.05/-0.05)
Width	.020 (+.002/-0.002)	.51 (+.05/-0.05)
Thickness	.009 - .011	.23 - .27
Top Term.	.004 - .006	.10 - .15

Approx. Weight .00043 grams

All product is tested IAW Mil-Std-202, method 208, including 8 hour steam aging.

OPTIONS

SOTA offers a full line of component parts in the 0202 size including High-Reliability (customer specified testing). Available options are epoxy bondable and wire bondable terminations, and custom part marking.

STATE OF THE ART, INC. 2470 Fox Hill Road, State College, PA 16803-1797
Phone (814) 355-8004 Fax (814) 355-2714 Toll Free 1-800-458-3401

05/21/99

Where Quality Isn't a Goal...It's Our Tradition