




State of the Art, Inc.

Thin Film Chip Resistor

M55342/08 RM2010

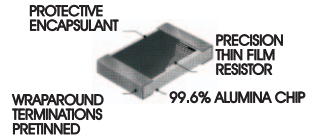

PERFORMANCE

Resistance Range 100Ω - 1MΩ
 Tolerances 0.1%, 1%, 2%, 5%
 Maximum Power 800 mW
 Maximum Voltage 150 Volts





TESTS

TCR (-55 to +125 °C) in ppm/°C ±25
 Thermal Shock ±0.1%
 Low Temperature Operation ±0.1%
 Short-time Overload ±0.1%
 Resistance to Soldering Heat ±0.2%
 Moisture Resistance ±0.2%
 Life, 2,000 Hours ±0.5%
 High Temperature Exposure ±0.1%

CHARACTERISTICS*

	E	H
TCR (-55 to +125 °C) in ppm/°C	±25	±50
Thermal Shock	±0.1%	±0.25%
Low Temperature Operation	±0.1%	±0.25%
Short-time Overload	±0.1%	±0.1%
Resistance to Soldering Heat	±0.2%	±0.25%
Moisture Resistance	±0.2%	±0.4%
Life, 2,000 Hours	±0.5%	±0.5%
High Temperature Exposure	±0.1%	±0.2%

*Maximum allowable change per MIL-PRF-55342, typical change is 10% of these values.

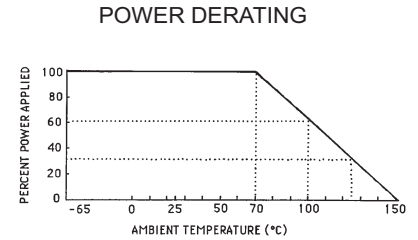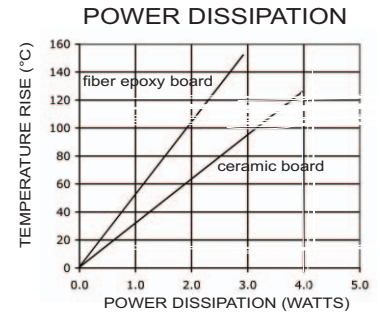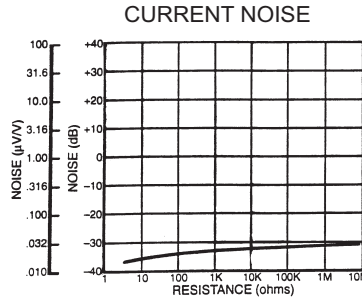

PART NUMBERING

M55342 H 08 B 100D R - TR

PACKAGING CODE: TR = Tape & Reel W= Waffle Pack

PRODUCT LEVEL DESIGNATOR: M: 1% per 1000 hrs. R: 0.01% P: 0.1% T: Space Level C: Non - ER

RESISTANCE AND TOLERANCE CODE:

Three significant digits, with a letter indicating the decimal location, the tolerance, and the value range.

A: 0.1% Ω D: 1% Ω G: 2% Ω J: 5% Ω
 B: 0.1% K Ω E: 1% K Ω H: 2% K Ω K: 5% K Ω
 C: 0.1% M Ω F: 1% M Ω T: 2% M Ω L: 5% M Ω

TERMINATION MATERIALS: B: Solderable wraparound W: Gold wire bondable


SIZE CODE: /08 = RM2010

TEMPERATURE CHARACTERISTIC: E: ± 25ppm H: ± 50ppm

PERFORMANCE SPECIFICATION MIL-PRF-55342

MECHANICAL

	INCHES	MILLIMETERS
Length	.202 (.191 - .218)	5.13 (4.85 - 5.54)
Width	.094 (.093 - .103)	2.38 (2.36 - 2.62)
Thickness	.025 (.015 - .033)	0.64 (0.38 - 0.84)
Top Term	.020 (.015 - .025)	0.51 (0.38 - 0.64)
Bottom Term	.019 (.015 - .025)	0.48 (0.38 - 0.64)
Gap	.164 (.160 - .168)	4.17 (4.06 - 4.27)
Approx. Weight	.0323 grams	

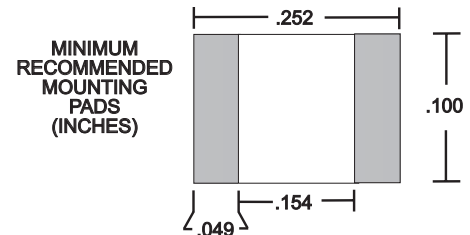

2470 Fox Hill Road, State College, PA 16803-1797

Phone (814) 355-8004 Fax (814) 355-2714 Toll Free 1-800-458-3401

04/09/08

Specifications subject to change without notice.

www.resistor.com